


General

Top layer	Thickness: 0.6mm
Dimensions	Length: 1810mm (71-1/4 inch)
	Width: 166mm (6 1/2 inch)
	Thickness: 12mm (1/2 inch)
Core	High Density Fibreboard (HDF)
Bevels	4 bevels (2x1.5mm + 2x0.5mm)
Gloss	Super matt (3)
Structure	Brushed
Backing	Real wood + Cork
Density	850kg/m ³
Weight/sqm	10kg
Connection system	Unifit X
Installation type	Floating
Standard Colors	<u>Oaks</u> : European, Ivory, Umber, Milk, Desert, Manhattan, Antique, Chocolate, Crystal, History Oak
	<u>Walnuts</u> : Smoked Walnut

Product composition

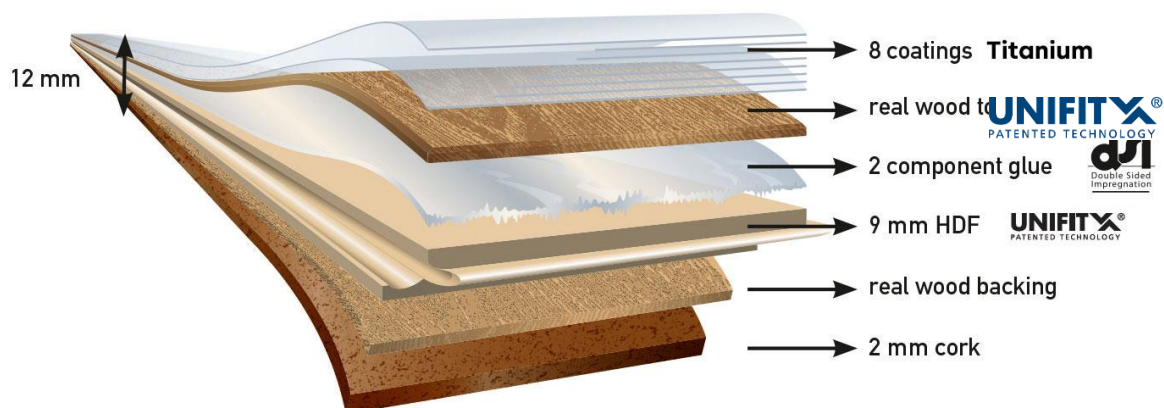

Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	33
CE Certification	EN14342:2013
Warranty	Residential limited lifetime warranty Commercial use: 10 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.109m ² K/w there is a minimal waste of energy.
Thermal resistance	0,109m ² K/W
Thermal conduction	0,11W/mK
Fire reaction & Smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'

Packaging

Box	7 boards Surface 2,103m ² (22.64 sq.ft) Gross weight 17,7kg (39 lbs)
Pallet	66 boxes Surface 138,8m ² (1494 sq.ft) Gross weight 1185kg (2612 lbs)

